



PU-X910B 1GE XPON ONU



High Speed CPU



Low Power Consumption





Software Customization



Optional Shell Supply

Brief Views


X910B is an indoor fiber broadband access terminal. The device provides one GPON / EPON adaptive optical port and supports XPON mode. It can be used in connection with CDATA FD16/17 series GPON OLT or FD11 / 12 series EPON OLT. It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet services based on GPON and EPON technology.

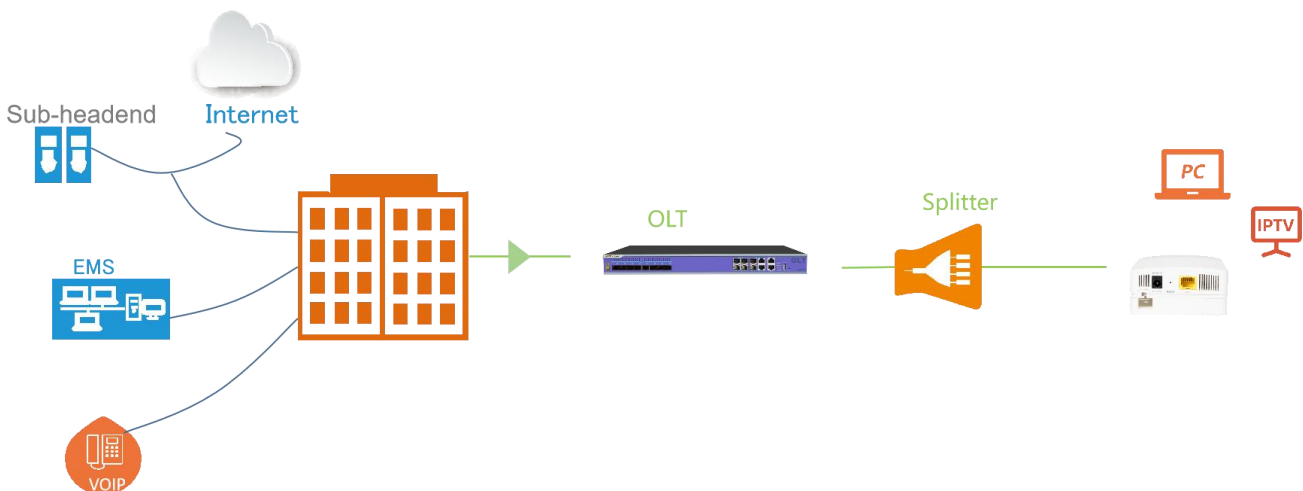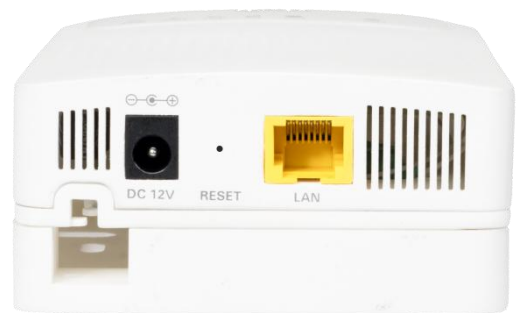

Functional Feature

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support remote WEB/Telnet access control

Product Interface and LED

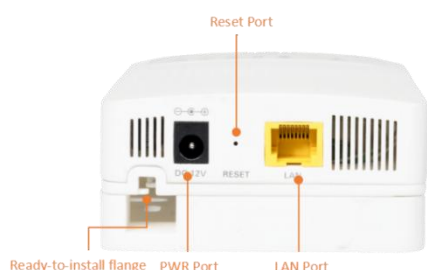

LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;

PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
LAN	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.

Product Specification

Mechanics

Dimensions	110*86*30mm (Without Coiled fiber box) 110*86*45mm (With Coiled fiber box)
Weight	About 125g

Hardware

User Port (LAN)		RJ-45 connector	
		1*10/100/1000Mbps adaptive Ethernet port	
		Full/half duplex	
		Auto MDI/MDI-X	
Indicators		PWR / PON / LOS / LAN / INT	
PON Port	PON Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+	
	PON Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream	
	Wavelength	Transmit: 1310nm	Receiver: 1490nm
	Receiving sensitivity	EPON: -27dBm	GPON: -28dBm
	Saturated power	EPON: -3dBm	GPON: -8dBm
	Transmitting power	EPON:0~4dBm	GPON: 0.5~5dBm

Environment

Working temperature	0 to 40° C
Operating humidity	10% ~ 90% (Non-condensing)

Power

External 12V/0.5A power supply adapter	
Power consumption	<3W